


Adjustable Swath Roller (Mounted, Tow Behind, Hydraulic)

- Adjustable width from 6' to 10', to accommodate varying swath sizes
- Floating roller mode for effective firming in highly variable swaths
- Quick and smooth height adjustment
- Corrosion and dent proof polyethylene roller
- Heavy-duty construction for years of trouble free operation.
- Reduces crop loss by minimizing the effects of wind
- Implement tires are standard on trailer model
- Hardware for mounting MT-2000 included for most models

Mounted Swath Roller

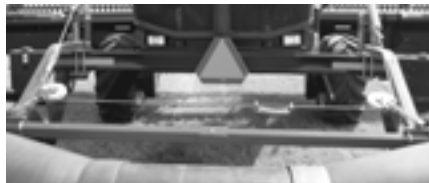


The **MT (Mounted) 2000** uses a winch and pulley system connected to a high rate tension spring to adjust the minimum working height of the roller. The winch adjustment allows the height of the MT2000 to be set in seconds. Each cog of the winch translates into about 1/2" of height adjustment of the roller. The cable is attached to a heavy-duty tension spring to absorb shock loads encountered in the field or in transport. The result is smooth, bounce-free performance. For transport, simply crank up the winch, insert the safety pins and you're ready to go!



The **MT (Mounted) 2000** mounts on any 4 wheel swather with a single tube, solid rear axle.

Tow Behind Swath Roller

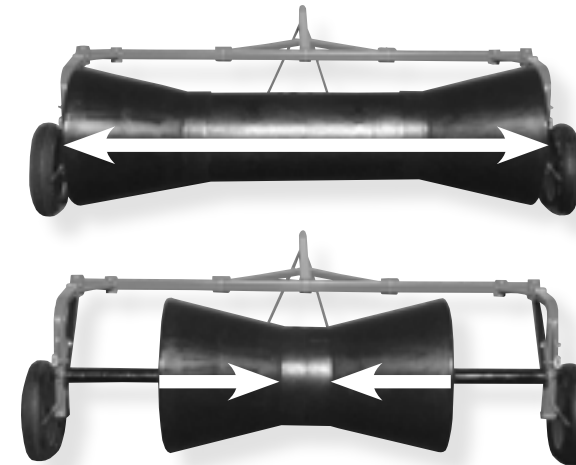

The quick height adjustment feature on the Tow Behind 2000 allows the operator to change the height of the roller quickly and easily. The floating roller mode allows the roller to automatically adjust to the different swath sizes. This feature will allow firming of swaths where it is often needed most...that is where the swaths are the lightest.

Hydraulic Swath Roller (MT2000H)

- Currently fits M150 and MT2000H MacDon Swathers
- Universal fit for other makes and models available soon
- Swath roller is hydraulically controlled from inside the cab

