




PLASTIC PRODUCTS

A DIVISION OF BOURGAULT INDUSTRIES LTD.

Vertical Storage Tank Specifications

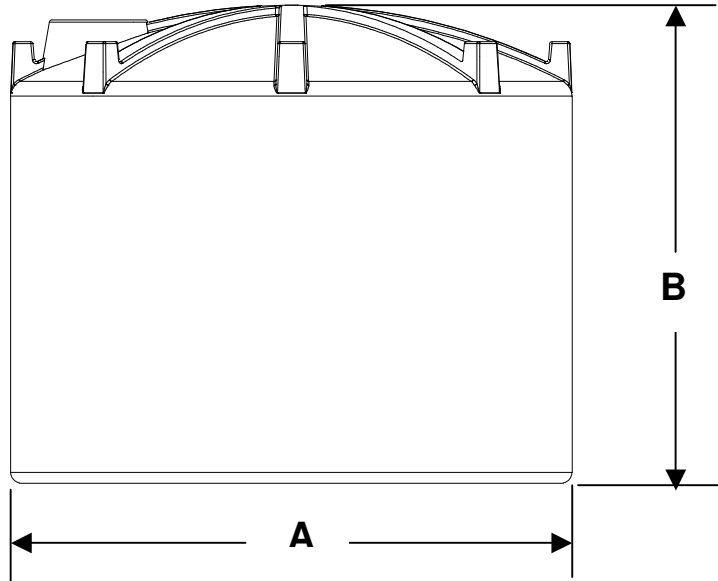

CAPACITY		SPECIFICATIONS				PART NUMBER			
IMP. GALS.	U.S. GALS.	DIMENSION A	DIMENSION B	LID SIZE	STANDARD FITTING	SD WHITE PART#	HD WHITE PART#	SD BLACK PART#	HD BLACK PART#
5000	6000	120"	130"	21"H	3"HD	2298	2299	2415	2416
3700	4440	104"	134"	16"	2"HD	1332	1333	1334	1335
2500	3000	102"	93"	16"	2"HD	1328	1329	1330	1331
2000	2400	102"	78"	16"	2"HD	1324	1326	1325	1327
1750	2100	92"	88"	16"	2"HD	1056	1054	1047	1053
1500	1800	102"	60"	16"	3"HD	1425	1426	1427	1428
1400	1680	88"	71"	16"	2"HD	1411	1412	1413	1414
1250	1500	88"	68"	16"	2"HD	1407	1408	1409	1410
500	600	57"	60"	8"	2"HD	1373	1153	1429	1430

FEATURES:

- All tanks have UV8 protection to prevent deterioration from sunlight.
- All tanks over 1250 imperial gallons come standard with tie down lugs, 16" vented lid, gallonage indicator, bulkhead fitting and interior siphon tube for more complete drainage.
- Optional 3" heavy-duty bulkhead fitting available.
- All tanks are available in translucent white or black. (Black eliminates algae formation.)
- Sight gauges available to allow product visibility in black tanks.
- All tanks are potable and manufactured from materials that meet FDA Regulations 21 CFR 177.1520 and may be used to contain materials for human consumption.
- Heavy duty tanks are typically used to contain liquids with densities up to 19 lbs. per gallon.
- Standard duty tanks are typically used to contain liquids with densities up to 14 lbs. per gal.
- Heavy duty tanks carry a five (5) year warranty against defects in workmanship.
- Standard duty tanks carry a three (3) year warranty against defects in workmanship.